




# 12505 HYUNDAI SANTE FE 757505

GROSSLOAD CAPACITY WHEN USED AS A WEIGHT CARRYING HITCH: 4,000 LBS. TRAILER WEIGHT & 400 LBS. TONGUE WEIGHT  
\*\*\*DO NOT EXCEED VEHICLE BUMPER GROSS TOWING CAPACITY , OR USE WITH WEIGHT DISTRIBUTION EQUIPMENT\*\*\*.

Parts List			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	6	ANSI B18.2.3.5M - M10 x 1.25 x 40	Hex Bolt
2	6	ASME B18.21.1 - 7/16 Reg. Crbn stl	Helical Spring Lock Washer

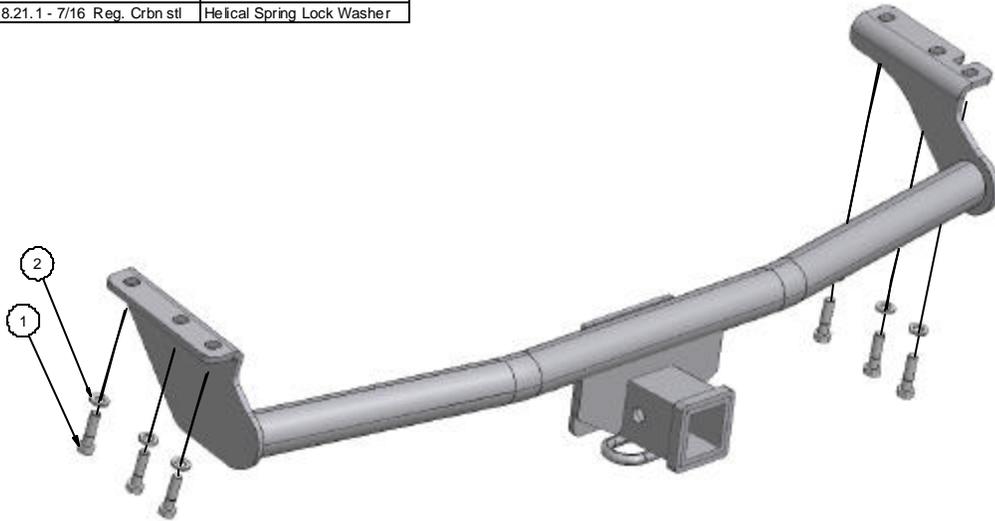

## INSTALLATION STEPS

- 1) TO EASE INSTALLATION LOWER THE SPARE TIRE OR REMOVE IT.
- 2) THE LOWERING OF THE EXHAUST IS NOT NECESSARY, BUT WILL MAKE THE INSTALLATION EASIER.
- 3) REMOVE THE TOW HOOKS FROM EACH SIDE AND DISCARD.
- 4) RAISE THE HITCH INTO POSITION, THE MAIN CROSS TUBE SHOULD BE CONCEALED BEHIND THE REAR FACIA.
- 5) ATTACH THE HITCH WITH THREE M10 FASTENERS ON EACH SIDE.
- 6) TORQUE ALL FASTENERS TO 38 FT/LBS.

Curt Manufacturing Inc., warrants this product to be free of defects in material or workmanship at the time of retail purchase by the original purchaser. If the product is found to be defective, Curt Manufacturing Inc., may repair or replace the product, at their option, when the product is returned, prepaid, with proof of purchase. Alteration to, misuse of, or improper installation of this product voids the warrant. Curt Manufacturing Inc.'s liability is limited to repair or replacement of products found to be defective, and specifically excludes liability for incidental or consequential loss or damage.